



ERBA ISOLANTI srl

Via Liguria n. 34/31 - 20068 Peschiera Borromeo (MI)
 telef. 02/5530.3089 - fax 02/5530.3127


DATA: 7.Set.94	TBL-HS HOLLOW BRAID POLYESTER YARN HEAT-SHRINKABLE	Codice TBLHS
Pag: 1/1		Scheda 45.7 GB tecnica
		Gruppo I

DESCRIPTION

Based on continuous Polyester yarns and braided into a hollow braid.
 Are principally made unbleached.
 Braided Tubular with continuous Fibers.

APPLICATIONS

Fastening, banding, binding of units. The more or less important heat shrinkage (see Properties) allows to obtain an excellent banding and avoid looseness between the different units.

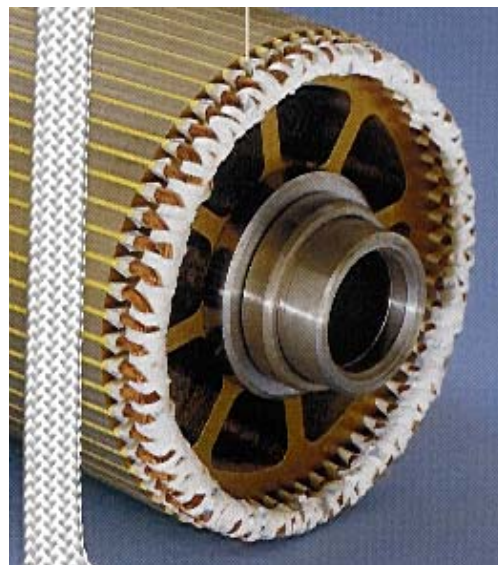

PROPERTIES

Reference	U.M.	T B L - H S											
Width	mm	6	8	10	16	18	20	22	24	26	30	35	
Yarn title	Dtex	1 1 0 0											
Weight	Gr/mt	4	8,5	11	17	21	25	29	40	43	48	55	
Wall thickness	mm	0,50	0,65	0,65	0,68	0,68	0,75	0,75	0,86	0,86	0,95	1,0	
Breaking resistance DaN	DaN	< 800			Between 800 ÷ 1.200			> 1.200					
Elongation to 2/3 of the resistance	%	< 20				> 20							
Shrinkage 1 h at 140°C Freely suspended	%	10 ± 3											

AVAILABILITY

On cardboard jaw bobbins.
 Jaw diameter 220, 300 mm.